


# R20-P

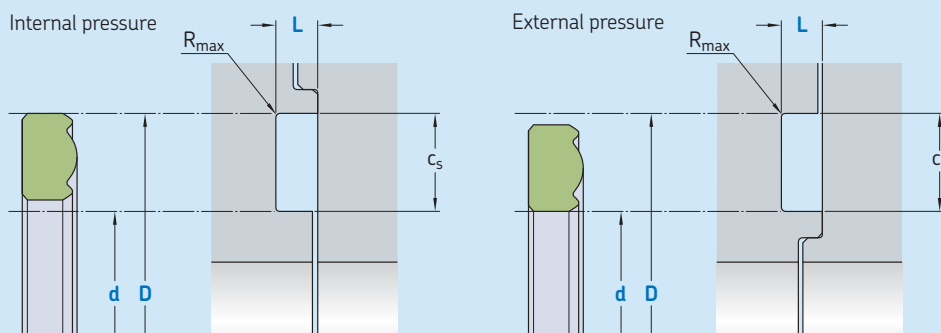

Ordering dimensions in **blue**

Pressure Surface roughness	Constant		Pulsating	
	$R_{tmax}$	$R_a$	$R_{tmax}$	$R_a$
	$\mu\text{m}$		$\mu\text{m}$	
<b>Sliding surface</b>	12,5	3,2	6,3	1,6
<b>Bottom of groove</b>	12,5	3,2	6,3	1,6
<b>Groove face</b>	12,5	3,2	6,3	1,6

Bearing area: 50–95% and a cutting depth of 0,5  $R_z$  based on  $C_{ref} = 0\%$

Standard dimensions					
d	D	$c_s$	L	$R_{max}$	
h11	H11		+ 0,2		
over	incl.				
mm					
<b>5</b>	<b>75</b>	d + 15	7,5	2,5	0,4
<b>75</b>	<b>100</b>	d + 16	8	4	0,4
<b>100</b>	<b>150</b>	d + 20	10	5	0,4
<b>150</b>	<b>200</b>	d + 25	12,5	6	0,4
<b>200</b>	<b>350</b>	d + 30	15	7,5	0,4
<b>350</b>	<b>600</b>	d + 40	20	10	0,4

Standard definition for this profile is inner pressure.  
d h11 = D H11

## Ordering example

Profile  
d x D x L [mm]  
Sealing material

Rotary seal R20-P  
100 x 108 x 7,7  
ECOPUR



## Operating parameters

Material Seal	Temperature		Speed	Pressure
	from	to	max	max
–	°C		m/s	bar (MPa)
■ ECOPUR	–30	+110	only recommended for static application	800 (80)
■ H-ECOPUR	–20			
■ S-ECOPUR	–50			
■ T-ECOPUR	–20			

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously. Standard of this profile is inner pressure.

© ECOPUR and SKF are registered trademarks of the SKF Group

© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB SE/P8 11890 EN · March 2012

