


S32-P

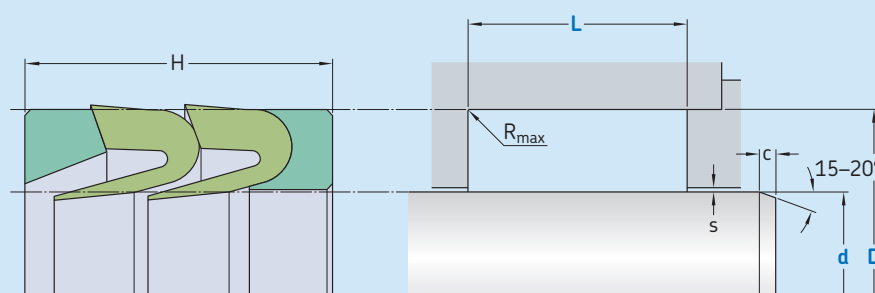

Ordering dimensions in **blue**

Surface roughness	R_{tmax}	R_a
Sliding surface	$\leq 2,5 \mu\text{m}$	$0,1-0,5 \mu\text{m}$
Bottom of groove	$\leq 6,3 \mu\text{m}$	$\leq 1,6 \mu\text{m}$
Groove face	$\leq 15 \mu\text{m}$	$\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of 0,5 R_z based on $C_{ref} = 0\%$

Standard dimensions

d	f8	D	L	R_{max}	c	s^*
over	incl.	H10	+ 0,2			
mm						
25	25	d + 12	24	0,4	4,5	0,6
47	47	d + 15	29	0,4	5	0,38
47	100	d + 20	38	0,4	6	0,50
100	150	d + 25	47,5	0,4	8,5	0,63
150	250	d + 30 / 35	57	0,4	10	0,75 / 0,88
250	500	d + 40 / 45	76	0,4	13	1,00 / 1,13
500	1 000	d + 50	95	0,4	16	1,25
1 000	2 500	d + 60	113	0,4	19	1,50

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values

Ordering example

Profile
d x D x L [mm]
Pressure ring / Chevron / Backup ring

Rod Seal S32-P
100 x 125 x 10
SKF Ecotal / ECOPUR / X-ECOPUR



Operating parameters

Material	Chevron	Backup ring	Temperature		Speed ¹⁾	Pressure ²⁾
			from	to	max	max
-			°C		m/s	bar (MPa)
■ SKF Ecotal ■ SKF Ecomid ³⁾	■ ECOPUR		-30		0,5	500 (50)
	■ H-ECOPUR		-20		0,7	
	■ S-ECOPUR	■ SKF Ecotal				
	■ T-ECOPUR	■ SKF Ecomid ³⁾				
	■ G-ECOPUR		-30	+100	0,5	
	■ ECOPUR	■ X-ECOPUR				
	■ H-ECOPUR	■ XH-ECOPUR				
	■ S-ECOPUR	■ XS-ECOPUR			0,7	
	■ G-ECOPUR	■ G-ECOPUR 54D			0,5	

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.

³⁾ D ≤ 260 mm → SKF Ecotal, D > 260 mm → SKF Ecomid.

© ECOPUR and SKF are registered trademarks of the SKF Group

© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB SE/P8 11940 EN · March 2012

