


K22-R

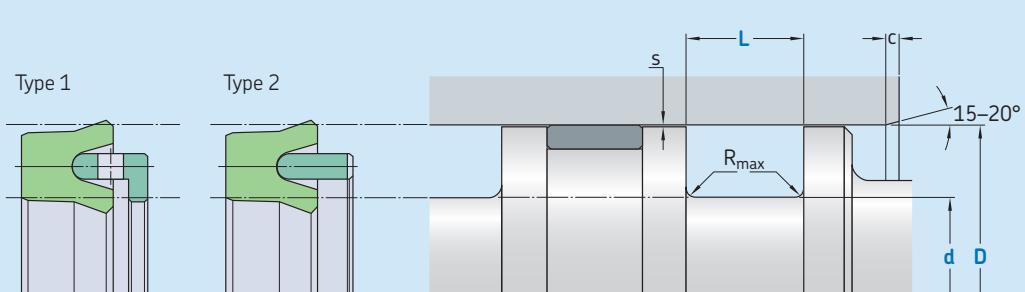

Ordering dimensions in blue

Surface roughness $R_{t\max}$ R_a

Sliding surface $\leq 2,5 \mu\text{m}$ $0,1\text{--}0,5 \mu\text{m}$

Bottom of groove $\leq 6,3 \mu\text{m}$ $\leq 1,6 \mu\text{m}$

Groove face $\leq 15 \mu\text{m}$ $\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

Standard dimensions

D H9	d h10	L $+0,2$	$R_{t\max}$	c	s*	20 bar	100 bar	160 bar
---------	----------	-------------	-------------	---	----	--------	---------	---------

mm mm

14	25	D – 8	6,0	0,4	3,5	0,23	0,16	0,14
25	50	D – 10	7,0	0,4	4,0	0,26	0,19	0,17
50	75	D – 12	8,0	0,4	4,5	0,29	0,22	0,20
75	150	D – 15	10,0	0,4	5,0	0,31	0,24	0,22
150	300	D – 20	12,0	0,4	6,0	0,34	0,27	0,25
300	500	D – 25	18,0	0,4	8,5	0,37	0,30	0,29
500	600	D – 30	20,0	0,4	10,0	0,40	0,34	0,32

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values.
Standard: type 2

Ordering example

Profile

D x d x L [mm]

Sealing material / Support ring

Piston seal K22-R Type 1

100 x 85 x 10

SKF Ecorubber-1 / SKF Ecotal



Operating parameters

Material Seal	Support ring	Temperature		Speed ¹⁾	Pressure ²⁾
		from	to	max	max
-		°C		m/s	bar (MPa)
■ SKF Ecorubber-1	■ SKF Ecotal ■ SKF Ecomid ³⁾	-30	+100		
■ SKF Ecorubber-2	■ SKF Ecoflon 2	-20	+200		
■ SKF Ecorubber-3	■ SKF Ecotal ■ SKF Ecomid ³⁾ ■ SKF Ecoflon 2	-40 -50	+100 +150	0,5	160 (16)
■ SKF Ecorubber-H	■ SKF Ecotal ■ SKF Ecomid ³⁾ ■ SKF Ecoflon 2	-25	+100 +150		
■ SKF Ecoflas		-10	+200		

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.

³⁾ D ≤ 260 mm → SKF Ecotal, D > 260 mm → SKF Ecomid.

