


# F05

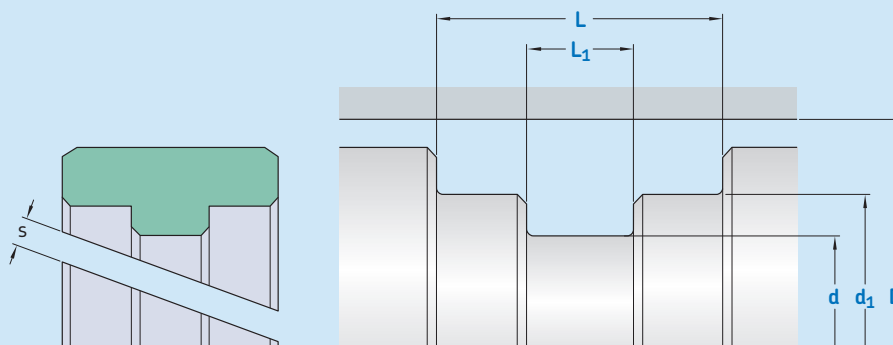

Ordering dimensions in **blue**

Sealing material Surface roughness	TPU / Elastomers		PTFE	
	$R_{tmax}$	$R_a$	$R_{tmax}$	$R_a$
	$\mu\text{m}$		$\mu\text{m}$	
<b>Sliding surface</b>	$\leq 2,5$	0,1–0,5	$\leq 2$	0,05–0,3
<b>Bottom of groove</b>	$\leq 6,3$	$\leq 1,6$	$\leq 6,3$	$\leq 1,6$
<b>Groove face</b>	$\leq 15$	$\leq 3$	$\leq 15$	$\leq 3$

Bearing area: 50–95% and a cutting depth of 0,5  $R_z$  based on  $C_{ref} = 0\%$

## Standard dimensions

D	H9	d	d <sub>1</sub>	d <sub>2</sub>	L	L <sub>1</sub>
	over	h10	h8		+ 0,2	+ 0,2
mm						
28	36	D – 6	D – 2,8	D – 0,35	8,5	3
36	60	D – 7,5	D – 3,2	D – 0,4	10,5	3,5
60	90	D – 9	D – 3,5	D – 0,5	15	5
90	150	D – 9	D – 3,5	D – 0,6	15	5
150	200	D – 16	D – 7,1	D – 0,7	20,3	8
200		D – 17	D – 7,5	D – 0,8	25	8

\* Cutting gap s → values depend on material and temperature. For detailed information please refer to the profile description.

## Ordering example

Profile  
D x d/d<sub>1</sub> x L/L<sub>1</sub> [mm]  
Guiding material

Guide ring F05  
100 x 91/96,5 x 15/5  
SKF Ecotal



## Operating parameters

Material Guiding	Temperature		Speed <sup>1)</sup>	Specific load <sup>2)</sup>
	from	to	max	
–	°C		m/s	N/mm <sup>2</sup>
■ SKF Ecoflon 2			4	3,0
■ SKF Ecoflon 3	–200	+200	5	4,5
SKF Ecoflon 60% Bz.				7,5
■ SKF Ecotal <sup>3)</sup>	–50	+100	4	25
■ SKF Ecomid	–40			
■ SKF Ecotex		+130		90

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

<sup>1)</sup> Surface speed limit values are valid only in the presence of a lubrication film.

<sup>2)</sup> Depending on temperature and allowed compression. Detailed information see profile description.

<sup>3)</sup> D ≤ 260 mm → SKF Ecotal, D > 260 mm → SKF Ecomid.