


S03-S

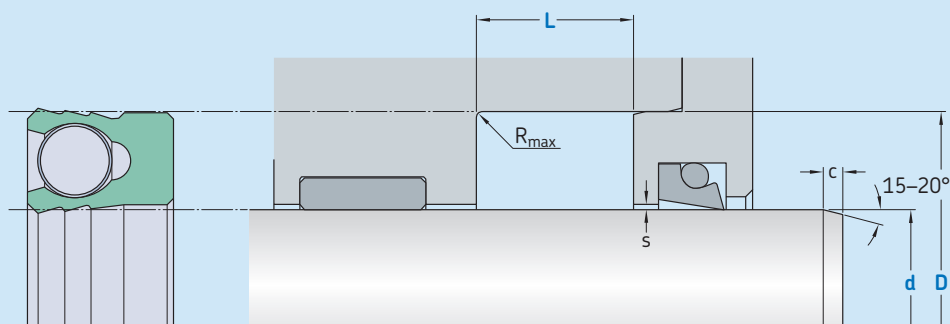

Ordering dimensions in **blue**

Surface roughness	R_{tmax}	R_a
Sliding surface	$\leq 2 \mu m$	$0,05-0,3 \mu m$
Bottom of groove	$\leq 6,3 \mu m$	$\leq 1,6 \mu m$
Groove face	$\leq 15 \mu m$	$\leq 3 \mu m$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

Standard dimensions						maximal radial extrusion gap				
d	D	L	R_{max}	c	s*					
f8	H10	+ 0,2				20 bar	100 bar	200 bar	300 bar	400 bar
over	incl.									
mm						mm				
6	10	d + 4	3,5	0,4	3,5	0,25	0,12	0,10	0,08	0,07
10	30	d + 6	5,0	0,4	3,0	0,35	0,17	0,12	0,10	0,08
30	120	d + 10	8,0	0,4	4,0	0,45	0,22	0,17	0,12	0,10
120	200	d + 15	11,5	0,4	5,0	0,75	0,40	0,33	0,25	0,18
200	250	d + 20	13,0	0,4	6,0	0,87	0,48	0,38	0,28	0,20
250	500	d + 25	18,5	0,4	8,5	0,87	0,48	0,38	0,28	0,20
500	1 600	d + 30	23,0	0,4	10,0	0,87	0,48	0,38	0,28	0,20

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values.

Ordering example

Profile
d x D x L [mm]
Sealing material / Spring

Rod seal S03-S
100 x 110 x 8
SKF Ecoflon 3 / 1.4310



Operating parameters

Material Seal	Spring	Temperature		Speed ¹⁾	Pressure ²⁾
		from	to	max	max
		°C		m/s	bar (MPa)
SKF Ecoflon 1					200 (20)
SKF Ecoflon 2 SKF Ecoflon 3 SKF Ecoflon 4	1.4310	-200	+260	1	400 (40)
SKF Ecowear 1000			+90	0,5	200 (20)

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.

® SKF is a registered trademark of the SKF Group

© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB SE/P8 11902 EN · March 2012

